


Why scrape

overspray residues from floor surfaces

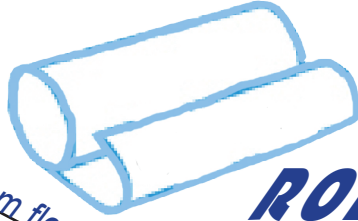

ROLL & GO
with Andreae Floor Paper

Flame retardant paper diminishes potential fire hazards and supports compliance with U.S. OSHA and NFPA safety standards for combustible floor surfaces, materials and deposits [OSHA 1910.107(b)(3), NFPA 33, 8.2].

OSHA 1910.107 (b)(3) “Floors”. The floor surface of a spray booth and operator’s working area, if combustible, shall be covered with noncombustible material of such character as to facilitate the safe cleaning and removal of residues.

NFPA 33 Standard For Spray Application Using Flammable or Combustible Materials 8.2 Combustible Deposits: All spray areas shall be kept free of the accumulation of deposits of combustible residues.

PART	DESCRIPTION		BOXES/SKID	WEIGHT/BOX
AP07362	36 in x 500 ft	0.91 x 152.4 m	30	44 lbs, 20 kg ±
AP07422	42 in x 500 ft	1.07 x 152.4 m	30	51 lbs, 23 kg ±
AP07602	60 in x 500 ft	1.52 x 152.4 m	30	73 lbs, 33 kg ±
AP07722	72 in x 500 ft	1.83 x 152.4 m	30	88 lbs, 40 kg ±
AP07842	84 in x 500 ft	2.13 x 152.4 m	25	103 lbs, 46 kg ±
AP08362	36 in x 300 ft	0.91 x 91.44 m	30	33 lbs, 15 kg ±
AP08422	42 in x 300 ft	1.07 x 91.44 m	30	38 lbs, 17 kg ±
AP08602	60 in x 300 ft	1.52 x 91.44 m	30	55 lbs, 25 kg ±
AP08722	72 in x 300 ft	1.83 x 91.44 m	30	66 lbs, 30 kg ±
AP08842	84 in x 300 ft	2.13 x 91.44 m	25	77 lbs, 35 kg ±
AP10362	36 in x 300 ft	0.91 x 91.44 m	30	39 lbs, 18 kg ±
AP10422	42 in x 300 ft	1.07 x 91.44 m	30	45 lbs, 20 kg ±
AP10602	60 in x 300 ft	1.52 x 91.44 m	30	64 lbs, 29 kg ±
AP10722	72 in x 300 ft	1.83 x 91.44 m	30	77 lbs, 35 kg ±
AP10842	84 in x 300 ft	2.13 x 91.44 m	25	90 lbs, 41 kg ±
Custom sizes available!			weights are averaged	

